

Conducted Emission Measurement


File :0920

Data :#7

Date: 2017-9-20

Time: 下午 03:58:36

120.0 dBuV

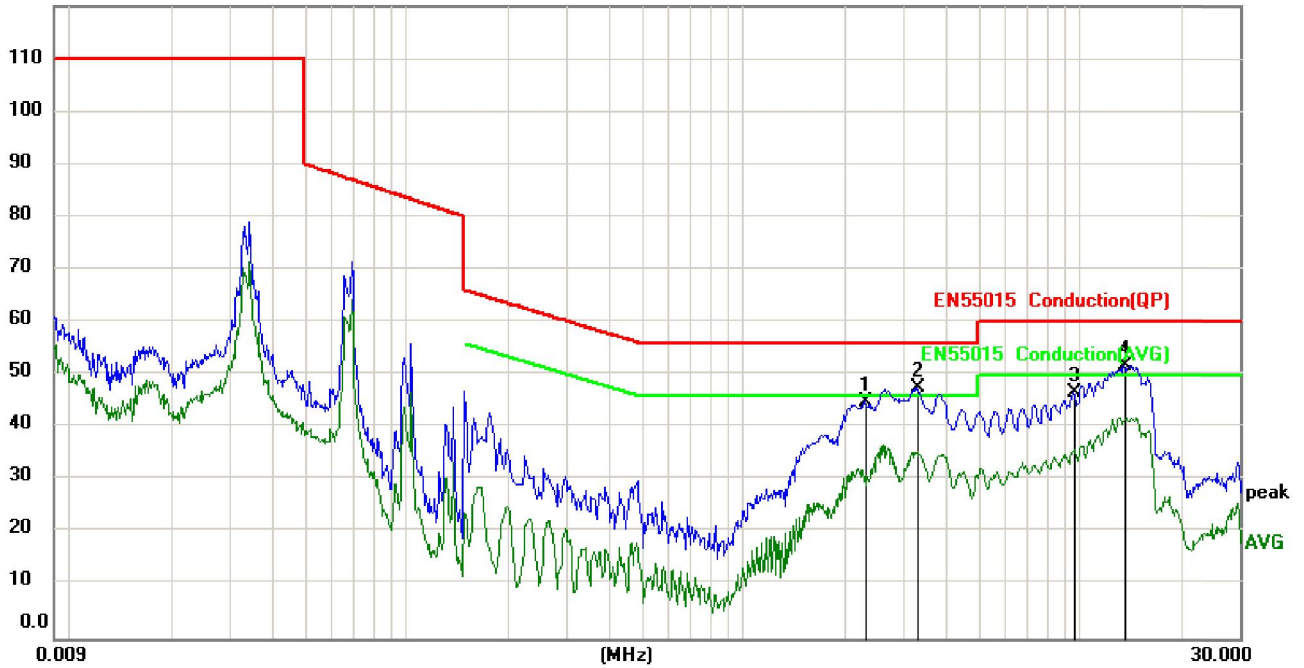

Site

Phase: **N**

Temperature: 25

Limit: EN55015 Conduction(QP)

Power: AC 230V/50Hz

Humidity: 55 %

EUT:

M/N: BP3378A+BP5001

Mode: Lighting

Note: 带三米调光线 1V

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		2.2966	33.42	11.58	45.00	56.00	-11.00	peak	
2		3.2866	36.26	11.23	47.49	56.00	-8.51	peak	
3		9.5866	35.28	11.29	46.57	60.00	-13.43	peak	
4	*	13.6456	40.34	11.52	51.86	60.00	-8.14	peak	

*:Maximum data x:Over limit !:over margin

<Reference Only

Conducted Emission Measurement


File :0920

Data :#8

Date: 2017-9-20

Time: 下午 04:02:06

120.0 dBuV

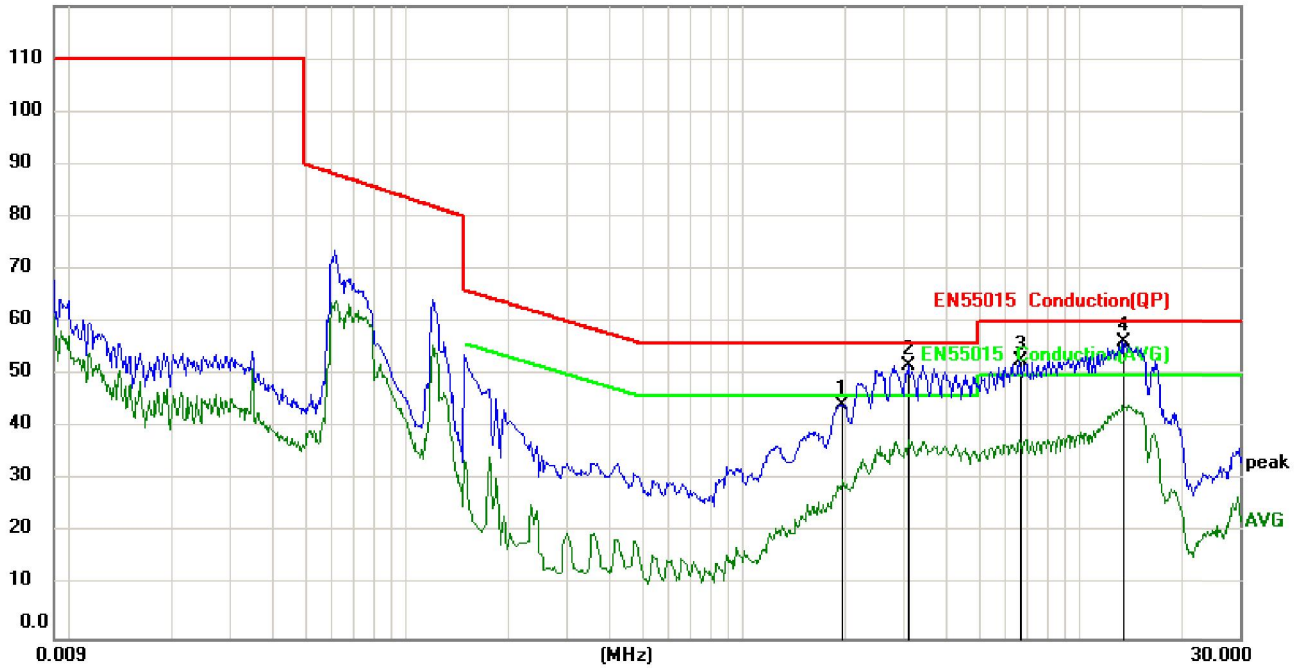

Site

Phase: **N**

Temperature: 25

Limit: EN55015 Conduction(QP)

Power: AC 230V/50Hz

Humidity: 55 %

EUT:

M/N: BP3378A+BP5001

Mode: Lighting

Note: 带三米调光线 10V

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		1.9546	32.67	11.67	44.34	56.00	-11.66	peak	
2		3.1156	40.54	11.29	51.83	56.00	-4.17	peak	
3		6.6616	41.77	10.87	52.64	60.00	-7.36	peak	
4	*	13.4611	44.77	11.50	56.27	60.00	-3.73	peak	

*:Maximum data x:Over limit !:over margin

<Reference Only

Conducted Emission Measurement


File :0920

Data :#9

Date: 2017-9-20

Time: 下午 04:05:50

120.0 dBuV

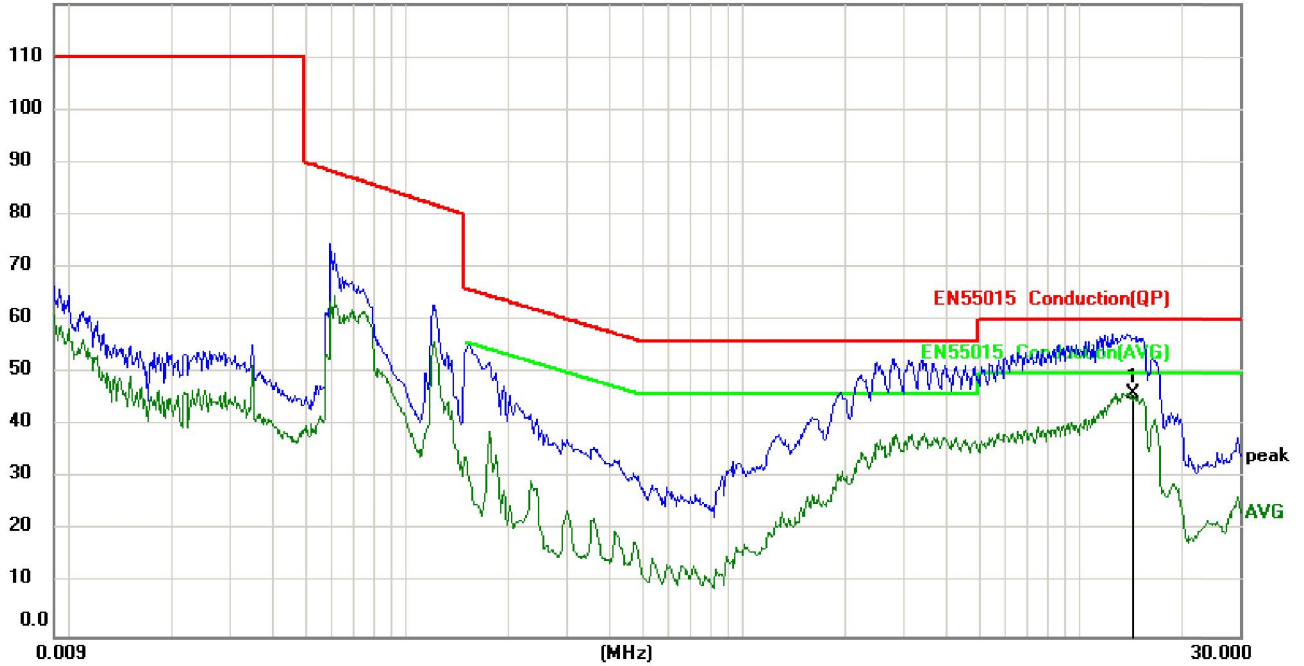

Site
Limit: EN55015 Conduction(QP)
EUT:
M/N: BP3378A+BP5001
Mode: Lighting
Note: 带三米调光线 10V

Phase: **L1**
Power: AC 230V/50Hz

Temperature: 25
Humidity: 55 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	14.3836	34.36	11.60	45.96	50.00	-4.04	AVG	

*:Maximum data x:Over limit !:over margin

<Reference Only